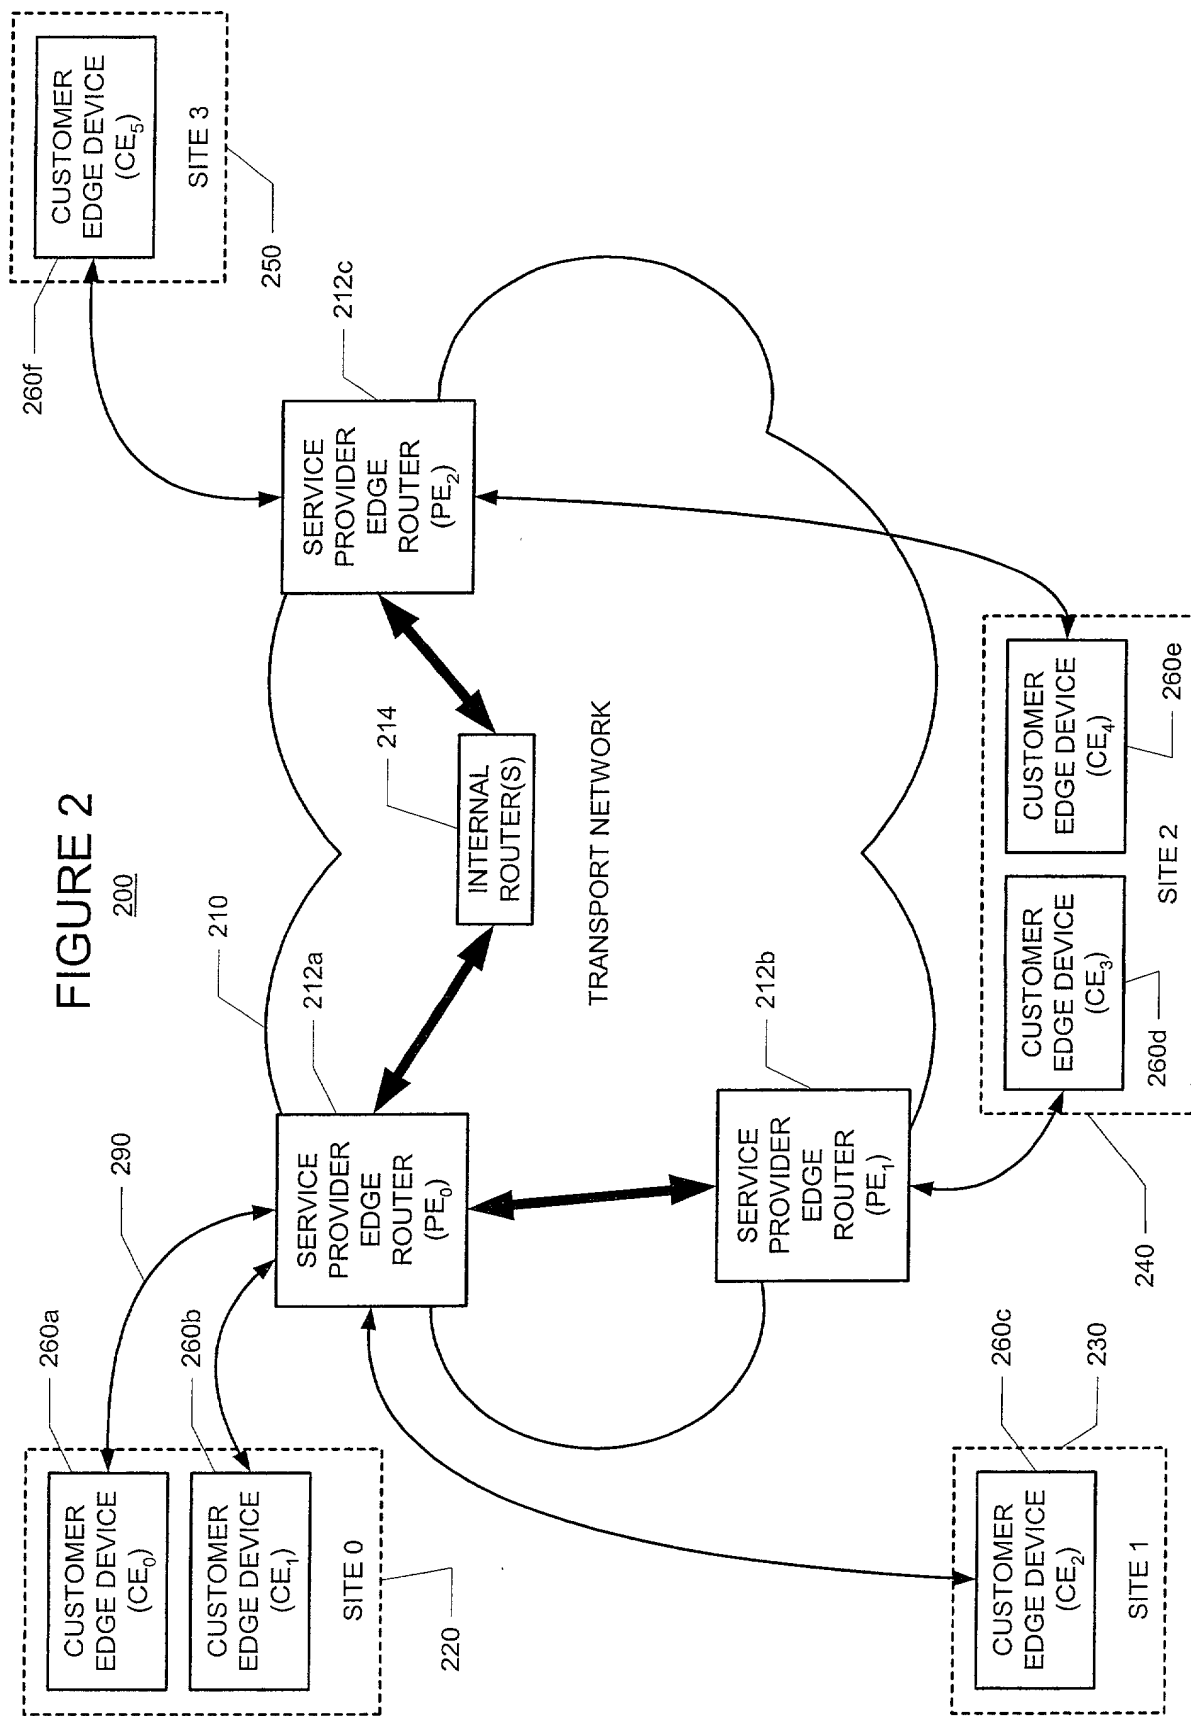


FIGURE 1

FIGURE 2



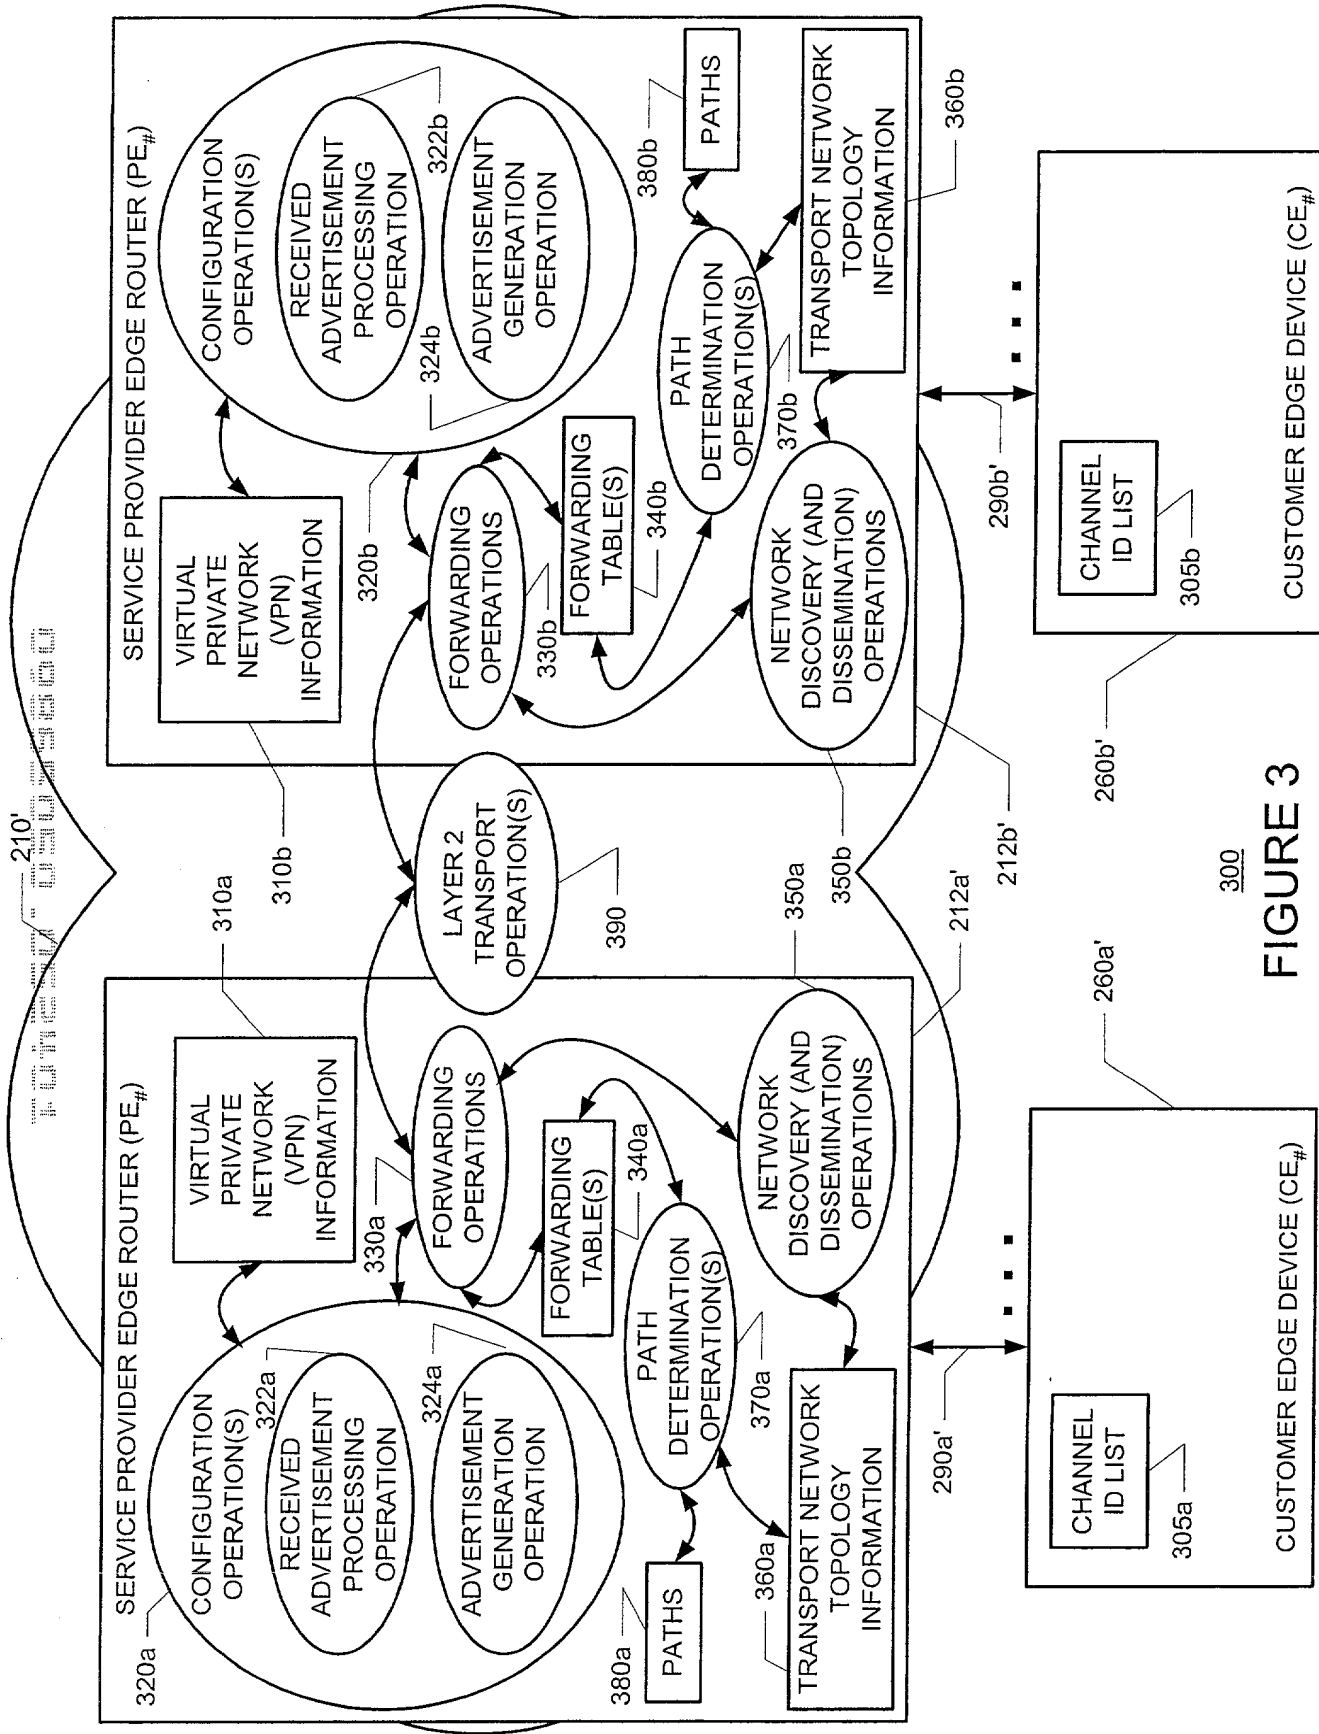


FIGURE 3

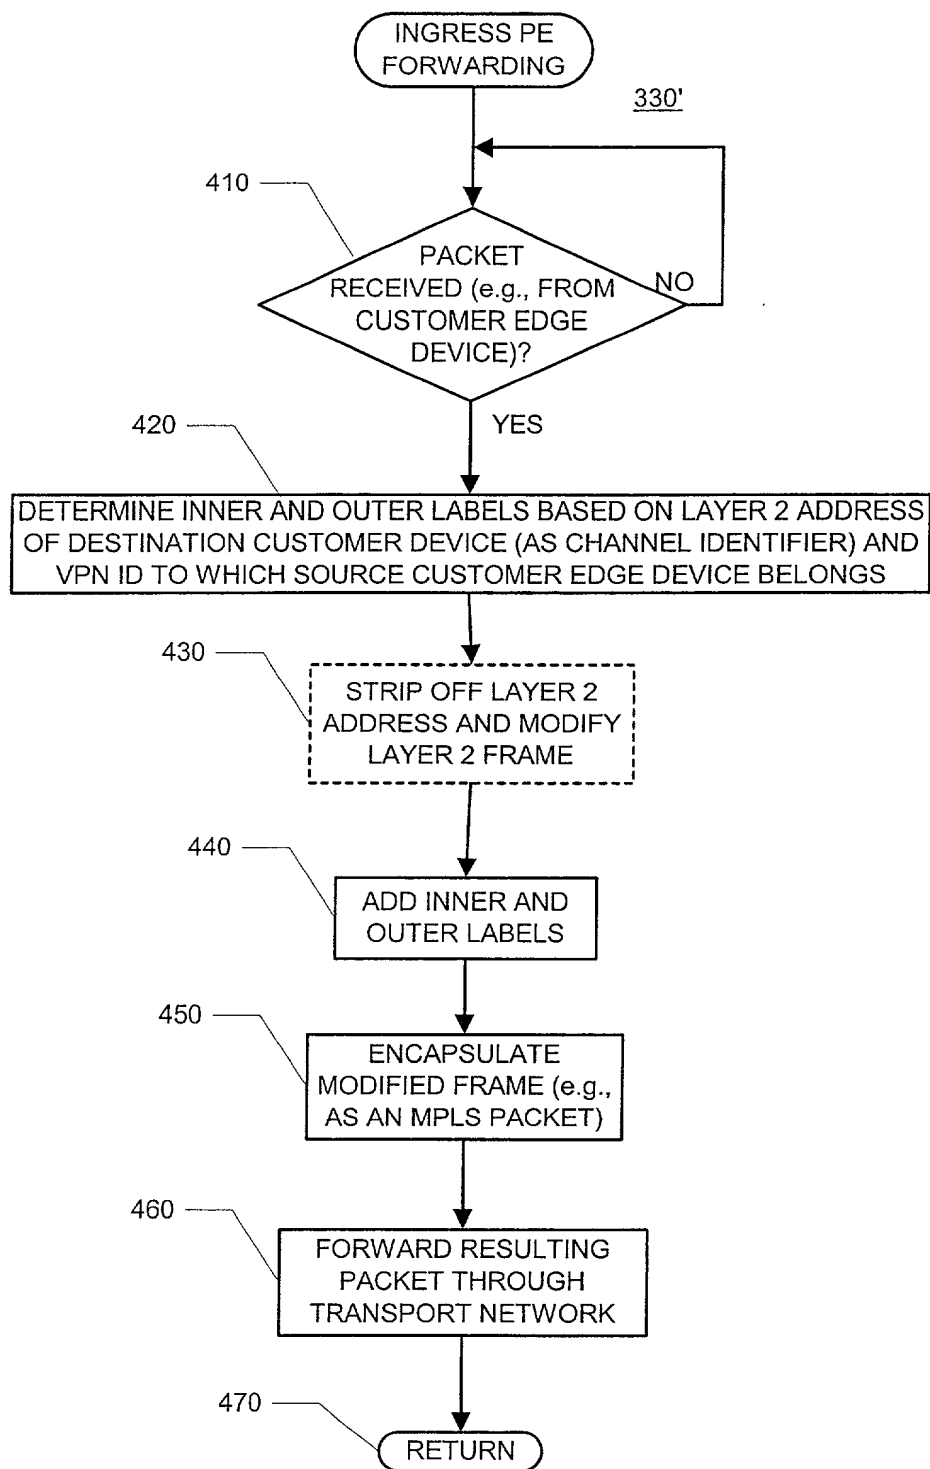


FIGURE 4

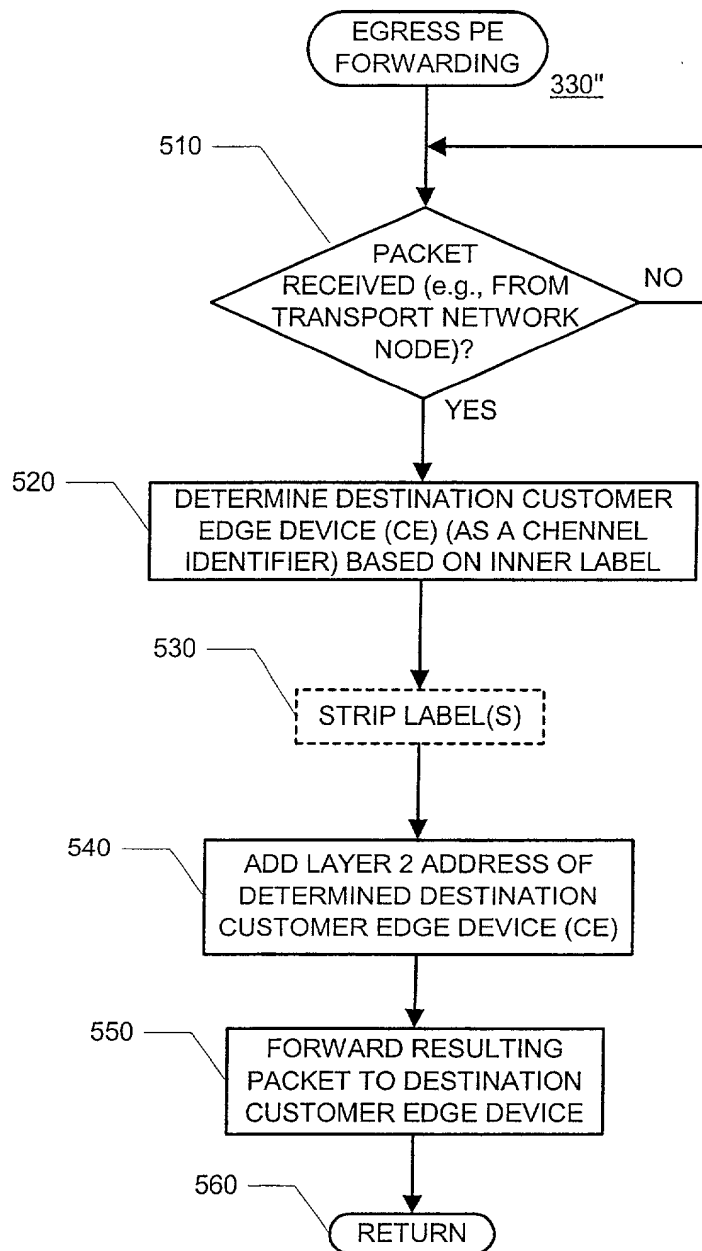


FIGURE 5

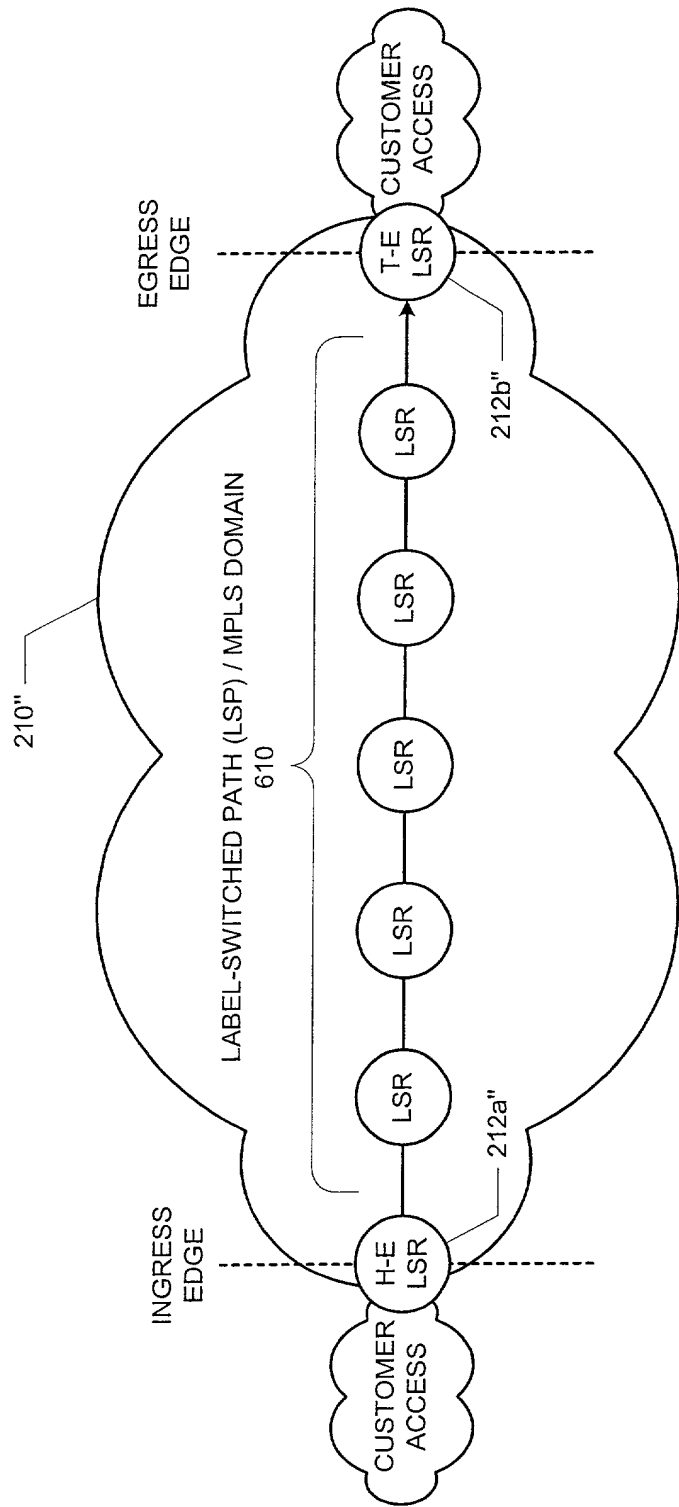
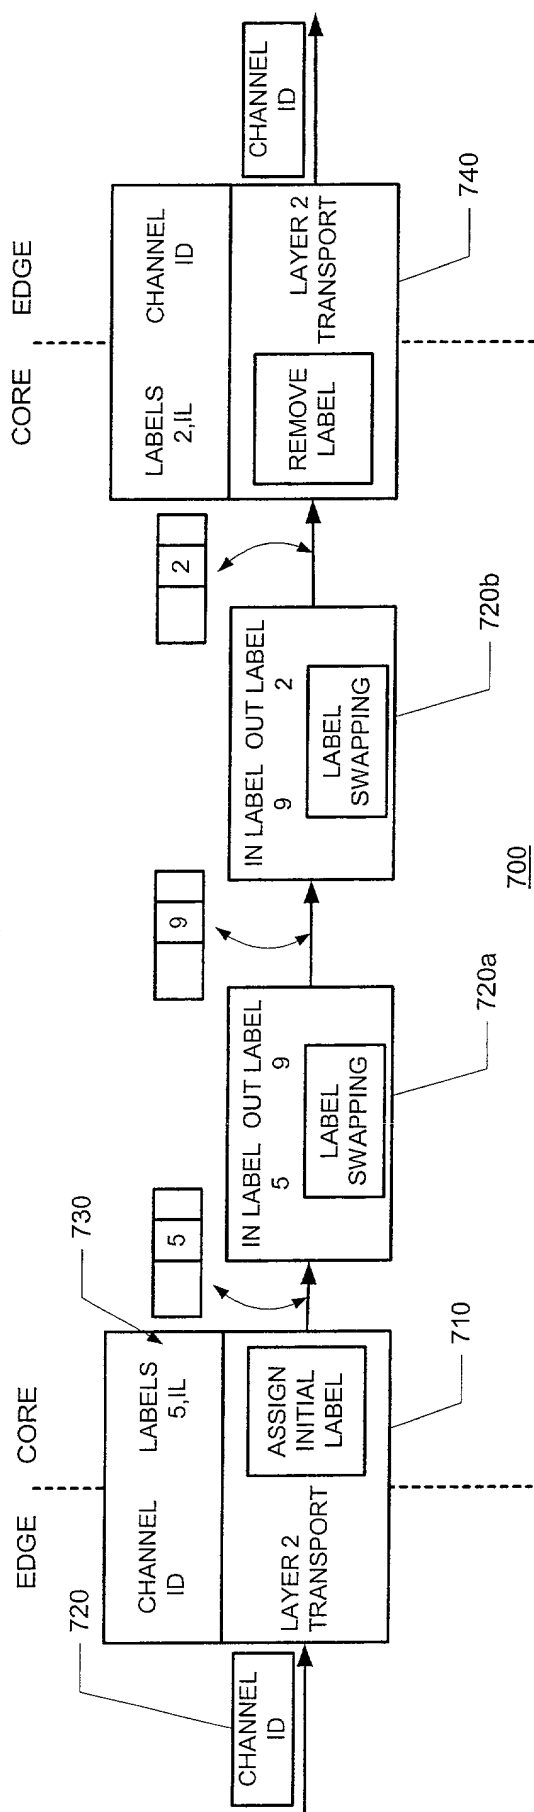


FIGURE 6

FIGURE 7



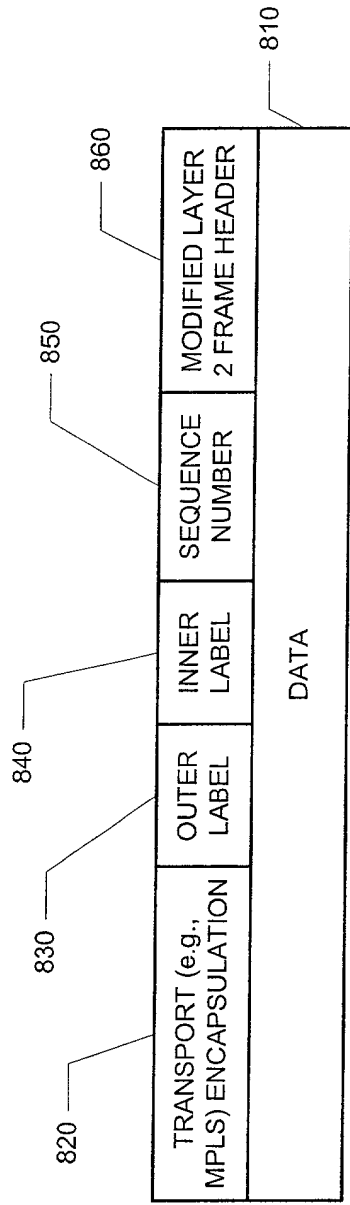


FIGURE 8

FIGURE 9

910

CHANNEL ID LIST (FOR CE 0)		
INDEX (=CE ID)	DESTINATION CE	CHANNEL ID
0	(SELF)	100
1	CE1	101
2	CE2	102
3	CE3	103
4	CE4	104
6	AVAILABLE	106
▪	▪	▪
▪	▪	▪
▪	▪	▪
9	AVAILABLE	109

LABEL BASE = 1000

RANGE = 10

ENCAPSULATION TYPE = FRAME RELAY

FIGURE 10

1010

VPN ID	CUSTOMER DEVICES IN VPN	LABEL BASE	RANGE	ENCAP. TYPE
1	CEO	1000	10	F.R.
▪	CE1			
▪	CE2			
▪	CE3			
	CE4			
	CE5			

CHANNEL IDs
100
101
102
103
104
105
106
107
108
109

CHANNEL ID	OUTER LABEL	INNER LABEL
104	9999	4000

INNER LABEL	CHANNEL ID
1004	104

940

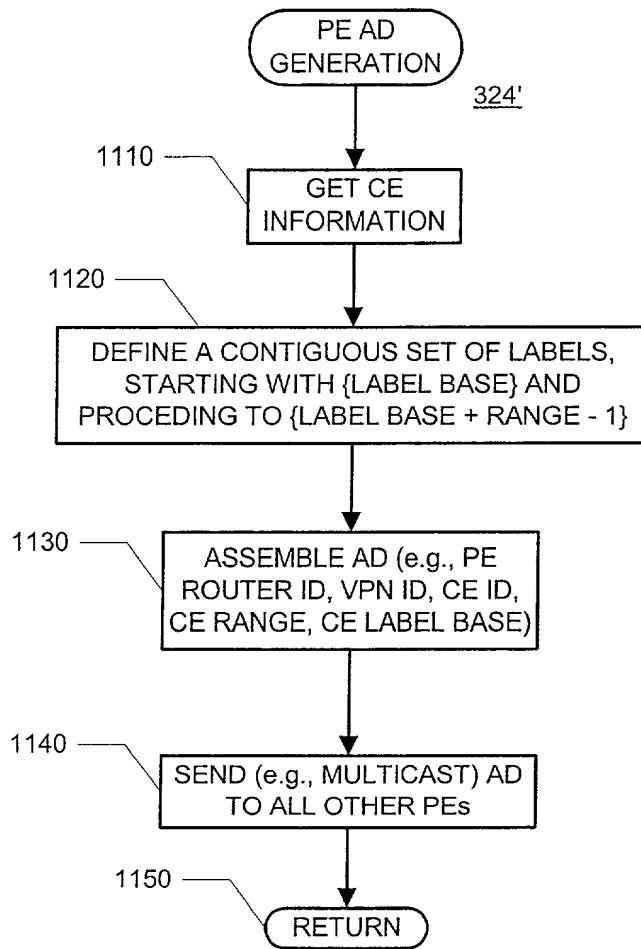


FIGURE 11

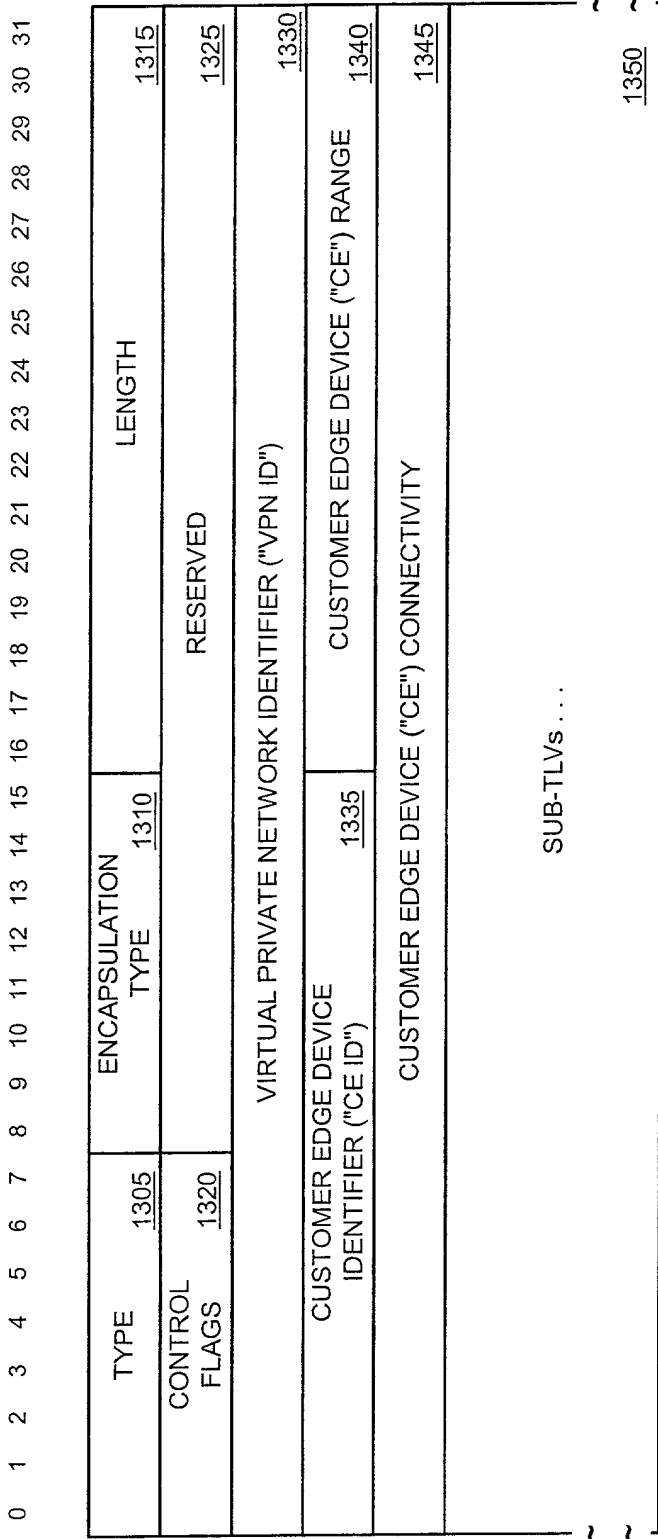


FIGURE 13 1300

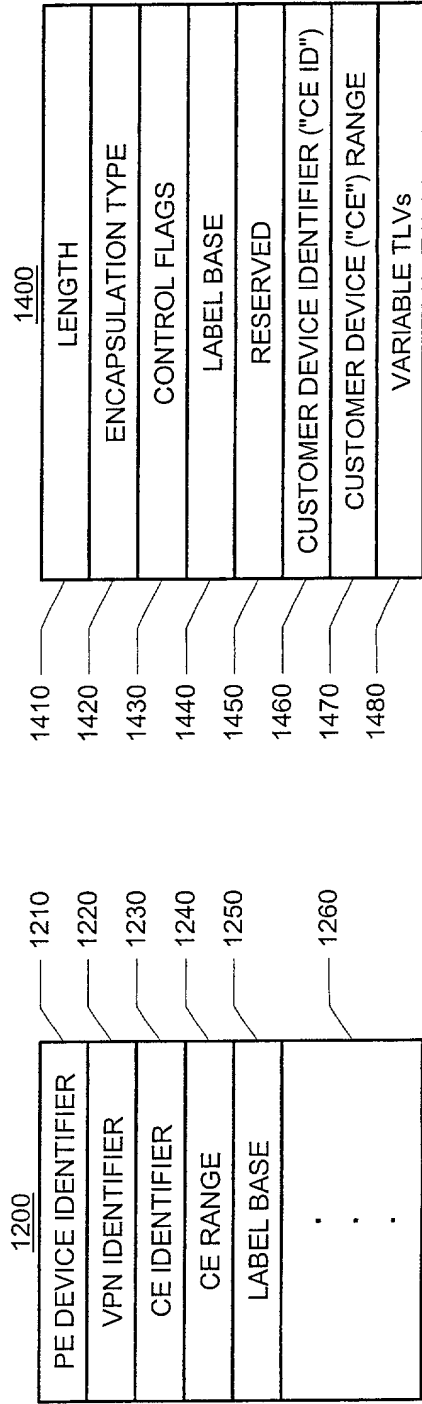


FIGURE 12

FIGURE 14

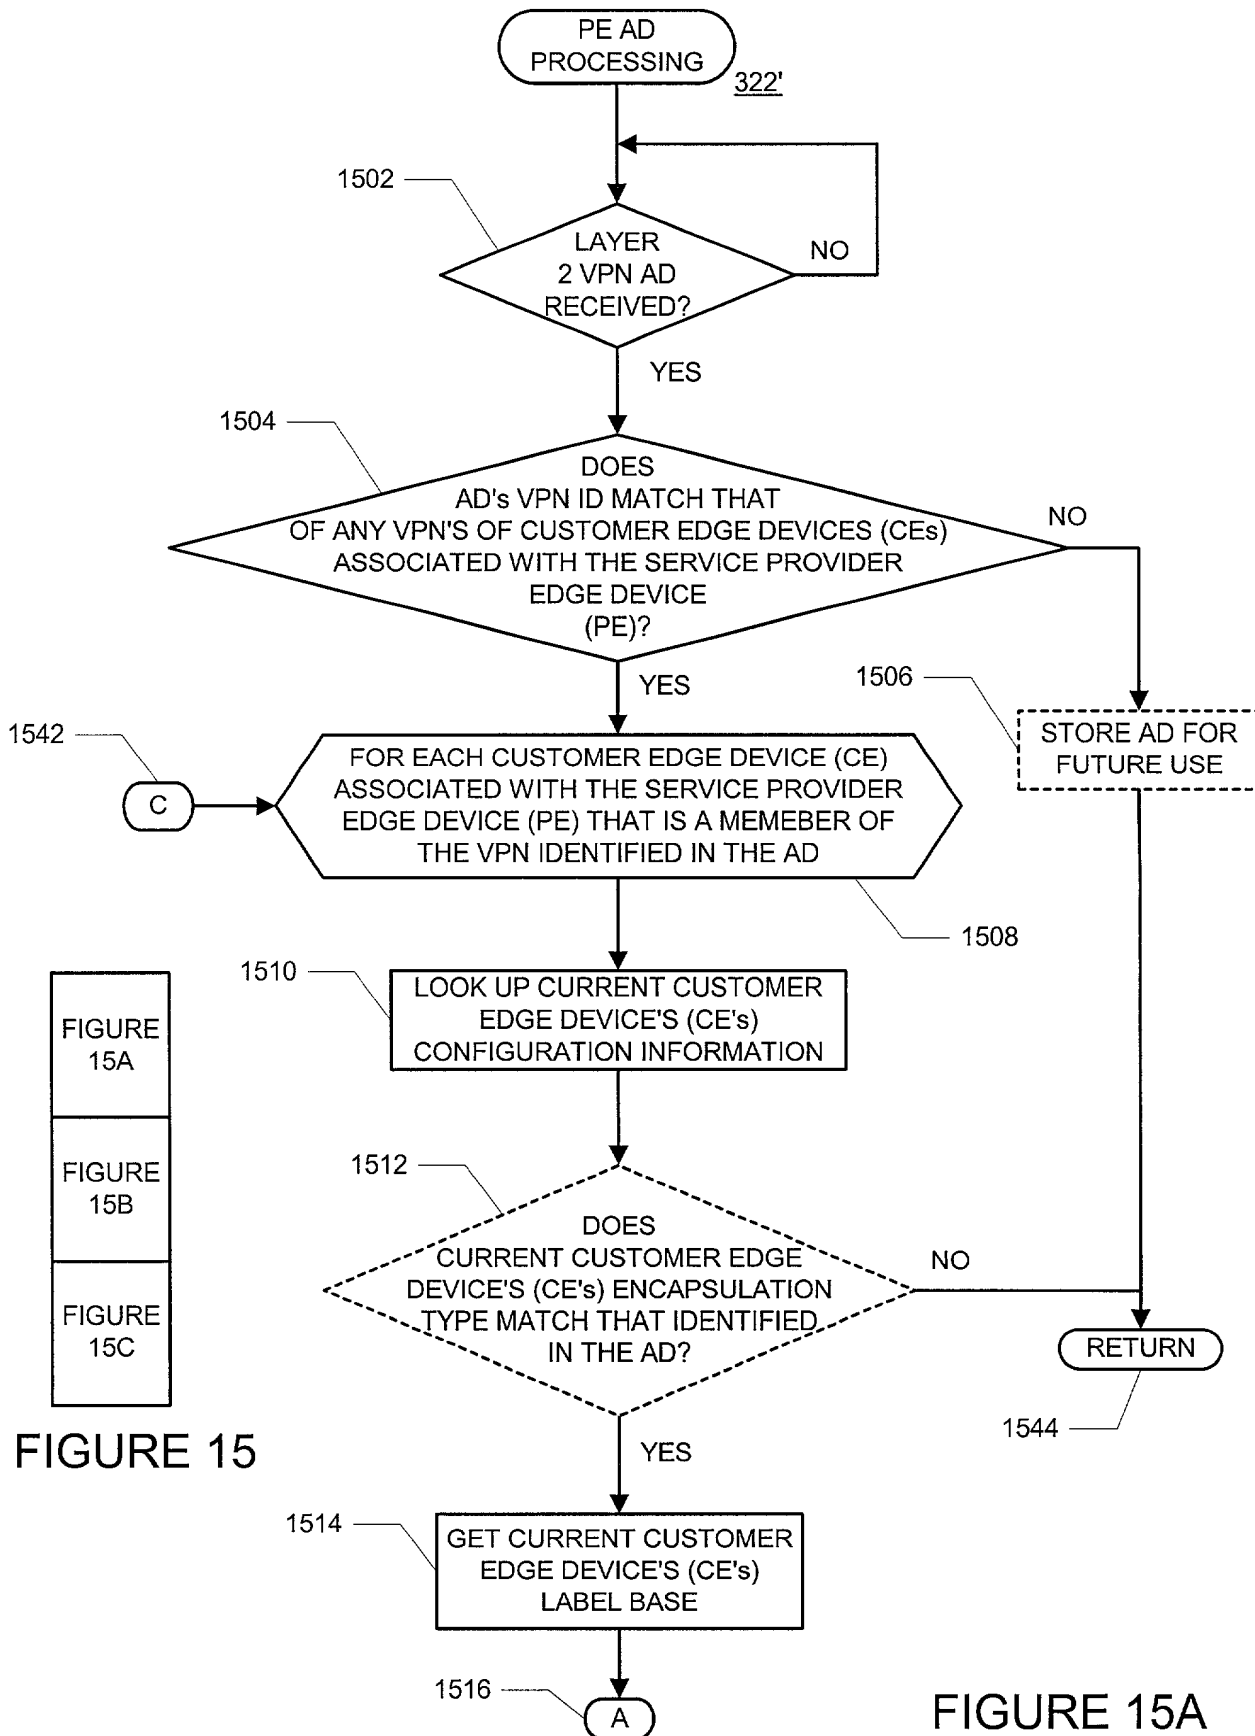
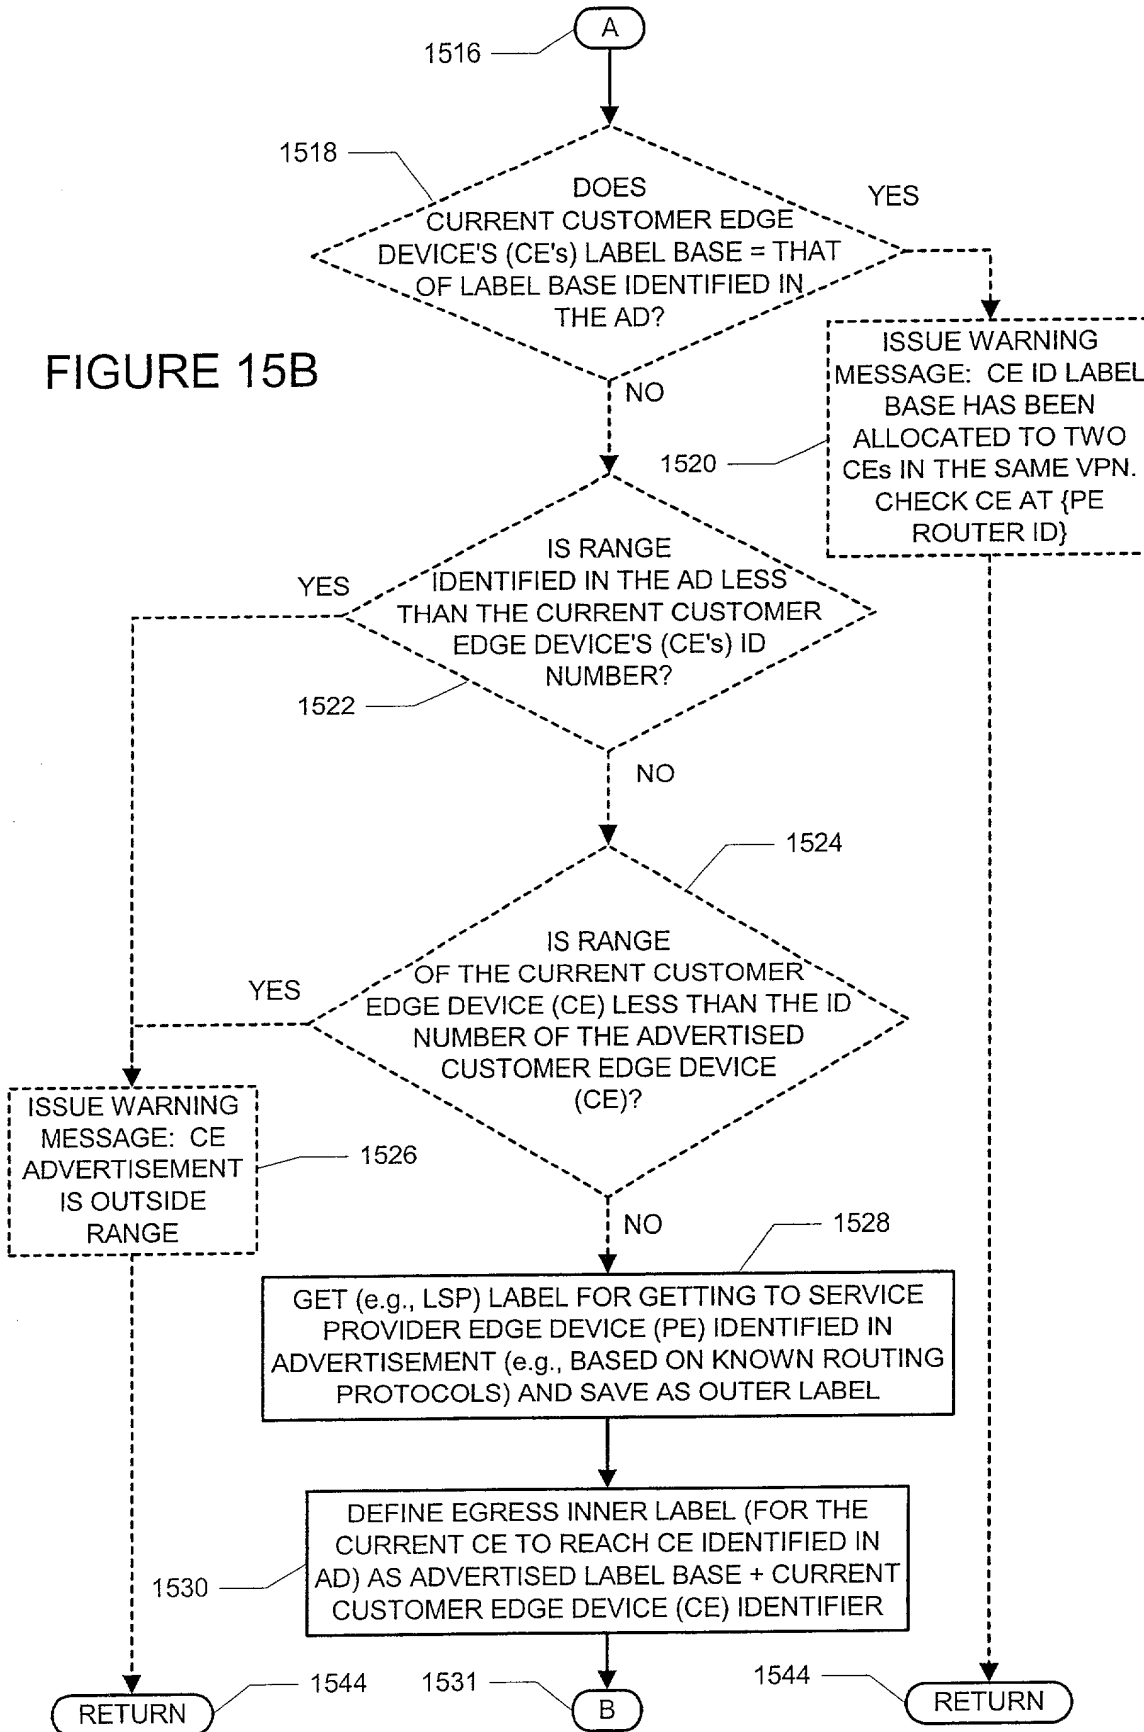


FIGURE 15

FIGURE 15A

FIGURE 15B






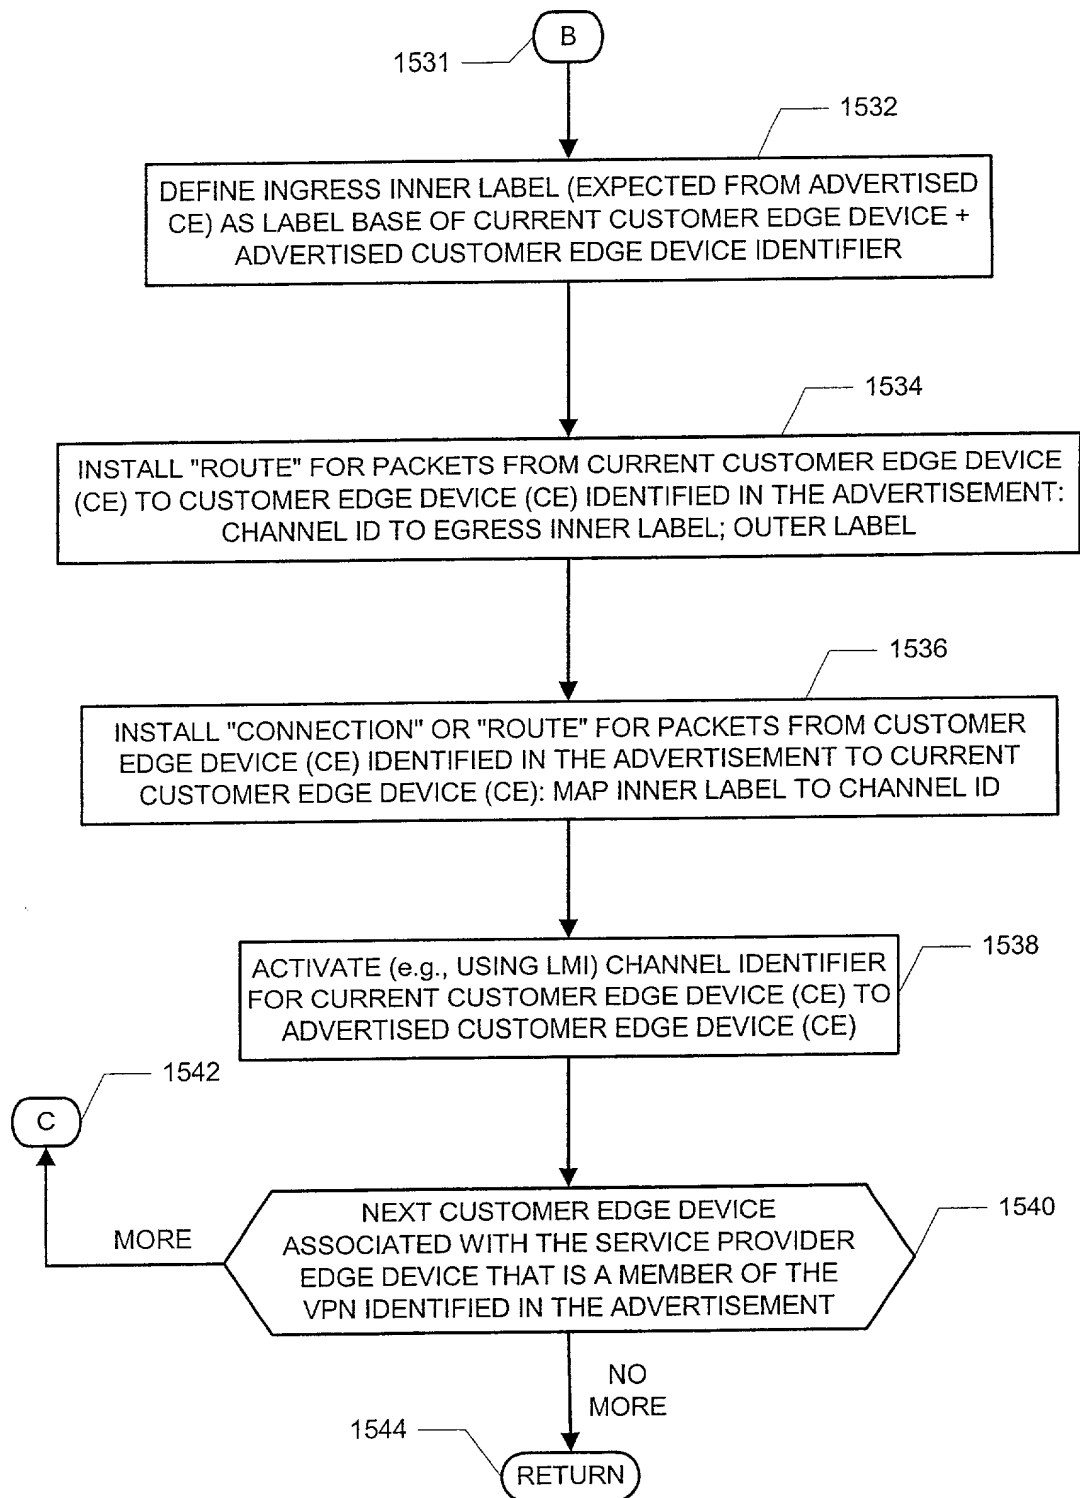


FIGURE 15C

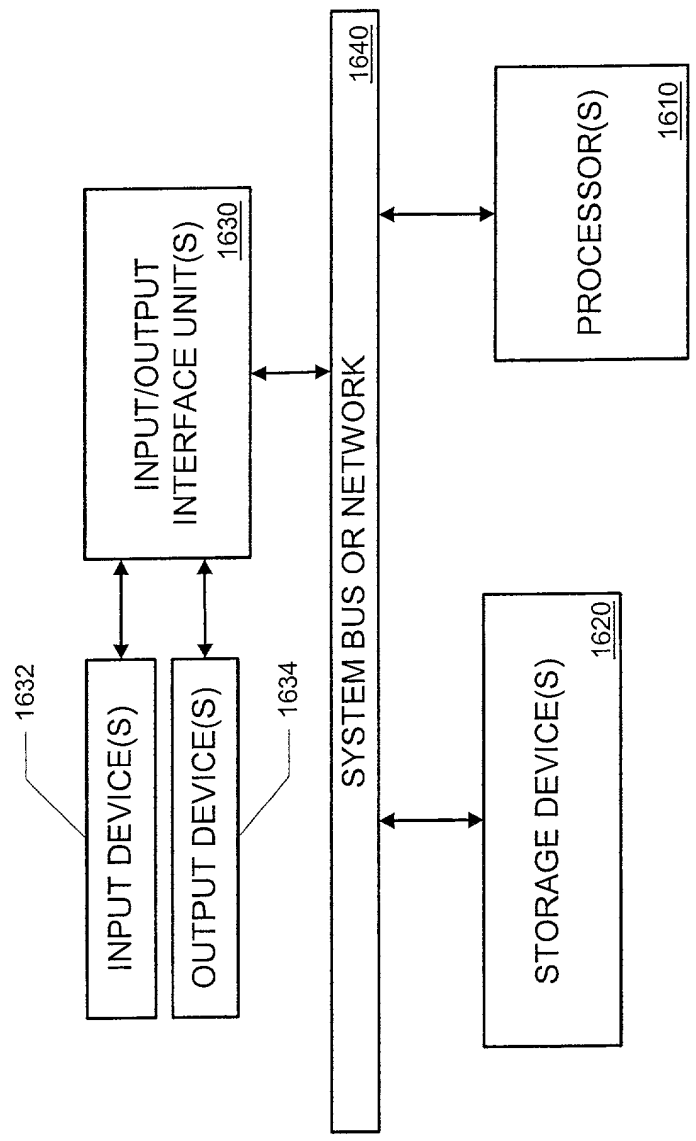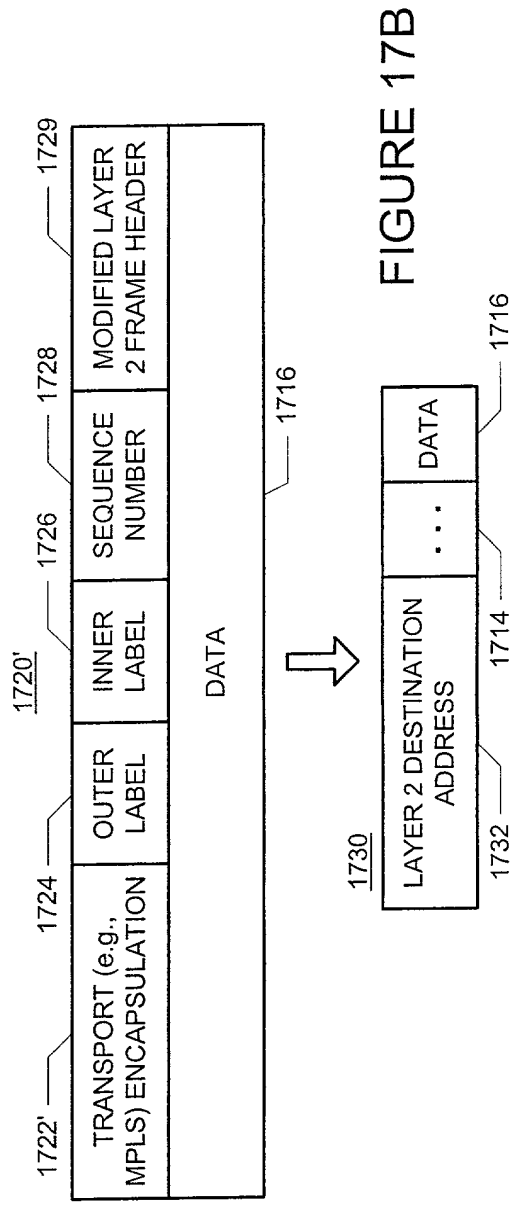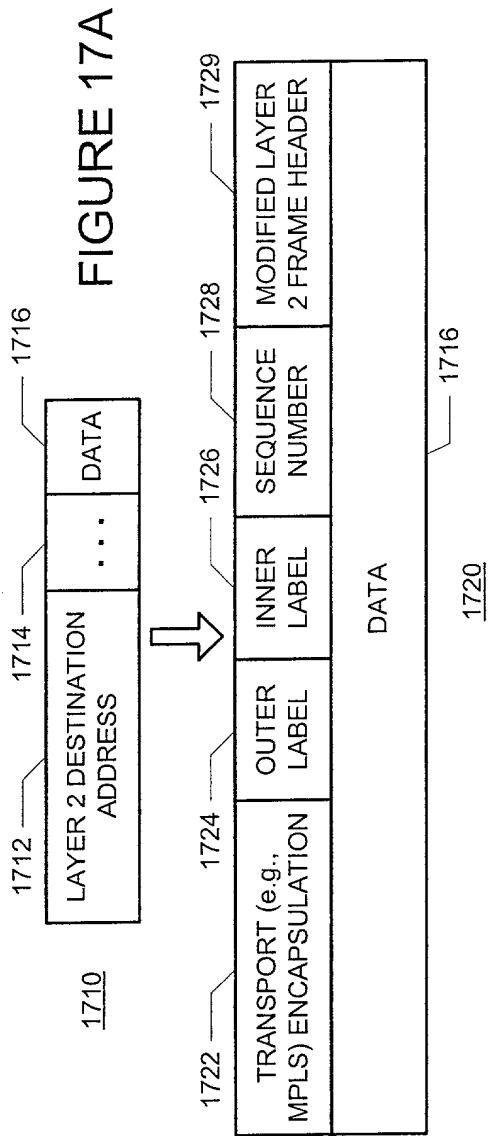

1600

FIGURE 16



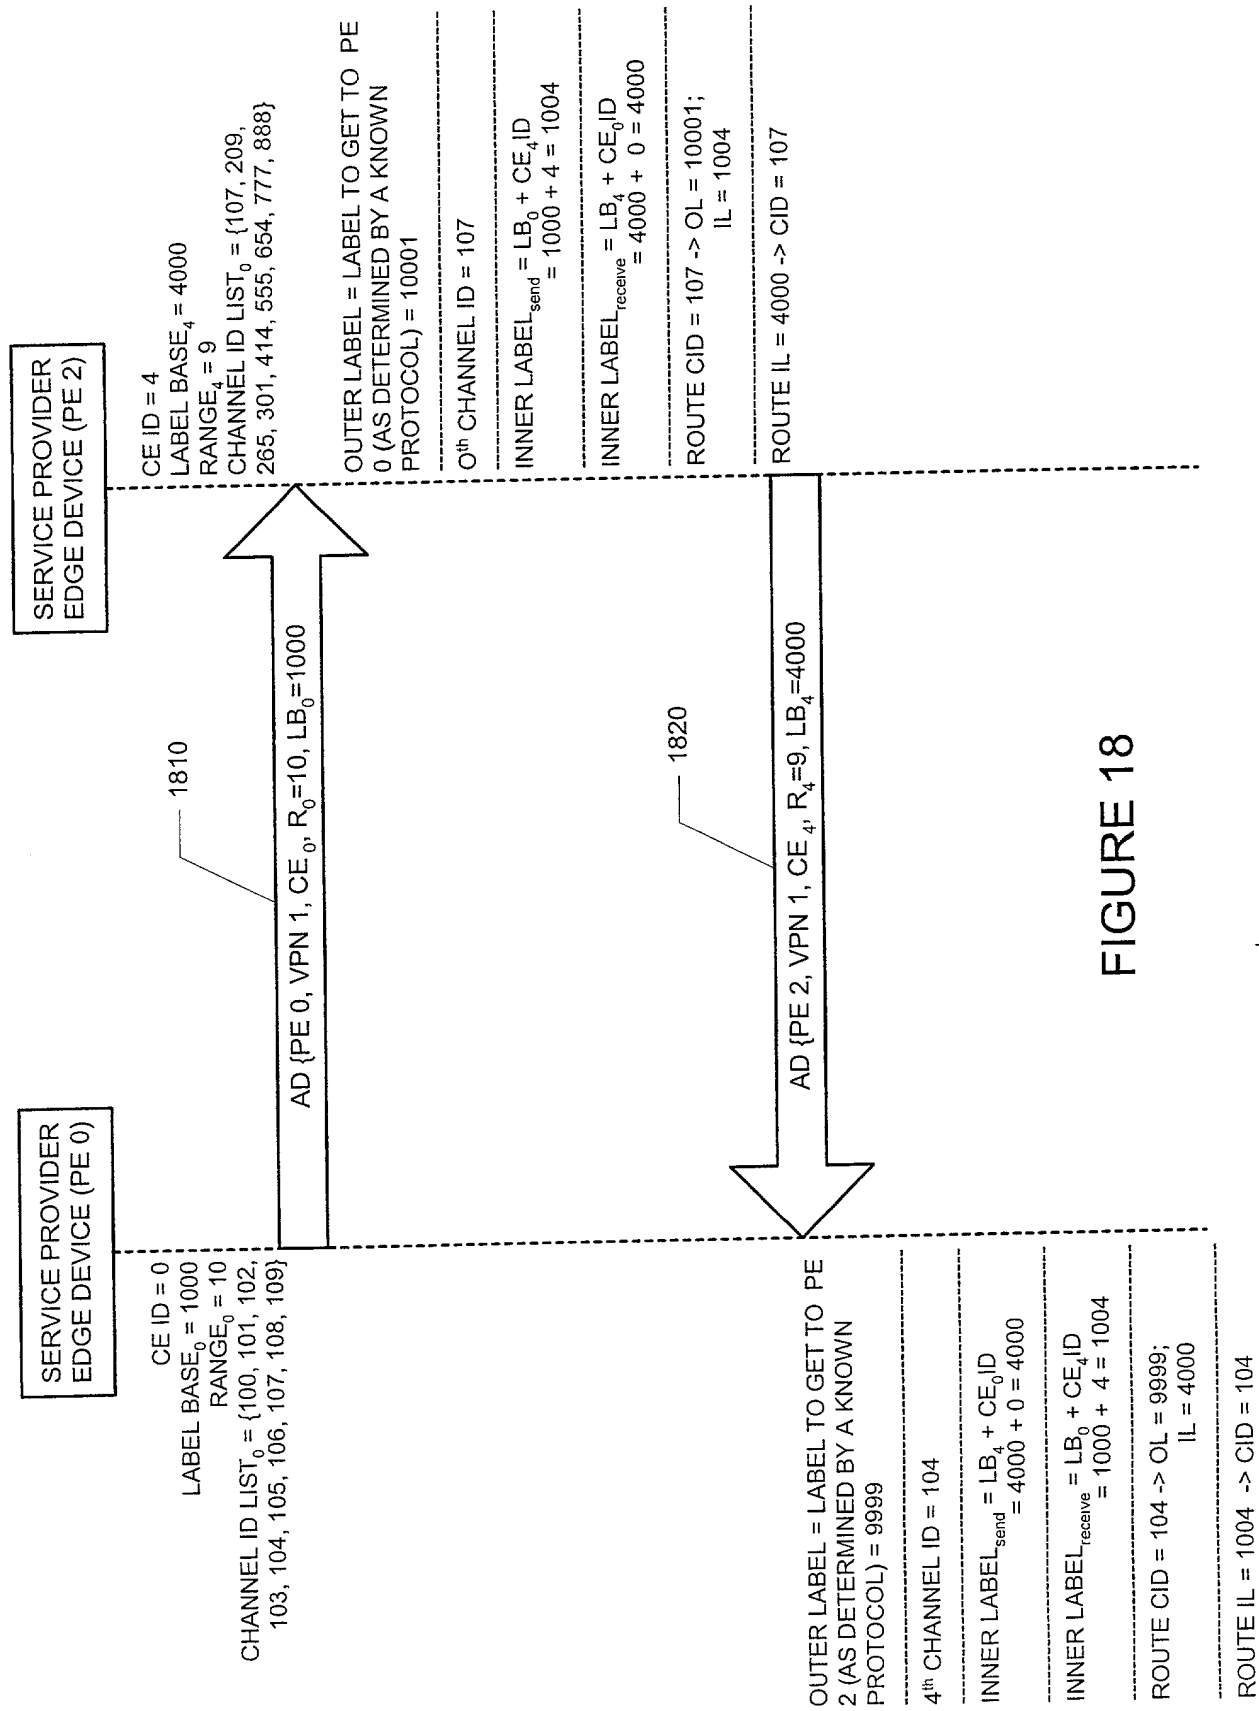


FIGURE 18